


Distributed by:



**[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

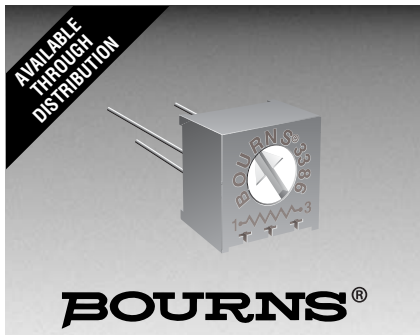

## Features

- Single Turn / Cermet / Industrial / Sealed
- Available on [tape and reel](#)
- Available with a knob for finger adjust
- Available with extended shaft
- Available with cross-slot rotor

- Top and side adjust types (F, P, H, W, X most popular)
- High voltage types available (see Model 3386 HV2/3386 HV3 for details)

## 3386 - 3/8" Square Trimming Potentiometer

### Electrical Characteristics

Standard Resistance Range .....10 to 2 megohms  
(see standard resistance table)  
Resistance Tolerance .....±10 % std.  
(tighter tolerance available)  
Absolute Minimum Resistance .....2 ohms max.  
Contact Resistance Variation .....2 % or 3 ohms max.  
(whichever is greater)  
Adjustability  
Voltage .....±0.05 %  
Resistance .....±0.15 %  
Resolution .....Infinite  
Insulation Resistance .....500 vdc.  
1,000 megohms min.  
Dielectric Strength  
Sea Level .....900 vac  
70,000 Feet .....350 vac  
Adjustment Angle .....280 ° nom.


### Environmental Characteristics

Power Rating (300 volts max.)  
85 °C .....0.5 watt  
125 °C .....0 watt  
Temperature Range .....-55 °C to +125 °C  
Temperature Coefficient .....±100 ppm/°C  
Seal Test .....85 °C Fluorinert\*  
Humidity .....MIL-STD-202 Method 103  
96 hours  
(2 % ΔTR, 10 Megohms min.)  
Vibration .....30 G (1 % ΔTR; 1 % ΔVR)  
Shock .....100 G (1 % ΔTR; 1 % ΔVR)  
Load Life .....1,000 hours 0.5 watt @ 70 °C  
(3 % ΔTR; 1 % or 1 ohm, whichever is greater, CRV)  
Rotational Life .....200 cycles  
(4 % ΔTR; 1 % or 1 ohm, whichever is greater, CRV)


### Physical Characteristics

Mechanical Angle .....310 ° nom.  
Torque .....5.0 oz-in. max.  
Stop Strength .....15.0 oz -in. min.  
Terminals .....Solderable pins  
Weight .....0.03 oz.  
Marking .....Manufacturer's trademark, resistance code, wiring diagram, date code, manufacturer's model number and style  
Flammability .....U.L. 94V-0  
Standard Packaging .....50 pcs. per tube  
Wiper .....50 % ±10 %  
Adjustment Tool .....H-90


### Common Dimensions Side Adjust

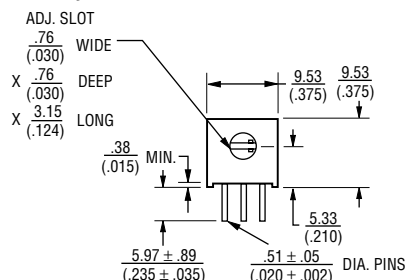


#### 3386B




#### 3386C




#### 3386H



#### 3386J




#### 3386S




SHADED AREAS NOT RECOMMENDED FOR NEW DESIGNS.

### 3386W



### 3386X



### Standard Resistance Table

| Resistance (Ohms) | Resistance Code |
|-------------------|-----------------|
| 10                | 100             |
| 20                | 200             |
| 50                | 500             |
| 100               | 101             |
| 200               | 201             |
| 500               | 501             |
| 1,000             | 102             |
| 2,000             | 202             |
| 5,000             | 502             |
| 10,000            | 103             |
| 20,000            | 203             |
| 25,000            | 253             |
| 50,000            | 503             |
| 100,000           | 104             |
| 200,000           | 204             |
| 250,000           | 254             |
| 500,000           | 504             |
| 1,000,000         | 105             |
| 2,000,000         | 205             |

Popular distribution resistance values listed in boldface. Special resistances available.

### How To Order

3386 P - 1 - 103 T

Model \_\_\_\_\_

Style \_\_\_\_\_

Standard or Modified \_\_\_\_\_

Product Indicator  
-1 = Standard Product  
-EY5 = Extended Shaft

Resistance Code \_\_\_\_\_

Optional Suffix Letter  
T = Knob

Consult factory for other available options.


TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{MM}}{(\text{INCHES})}$


# 3386 - 3/8 " Square Trimming Potentiometer

**BOURNS®**


## Common Dimensions Top Adjust

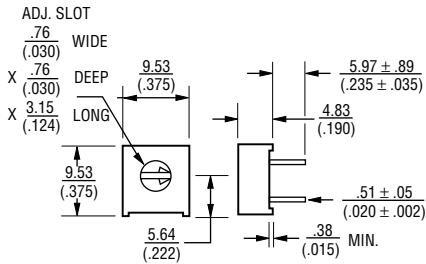


### 3386F




### 3386K





### 3386M




### 3386P




### 3386R




### 3386T




### 3386U




### 3386Y




### 3386G

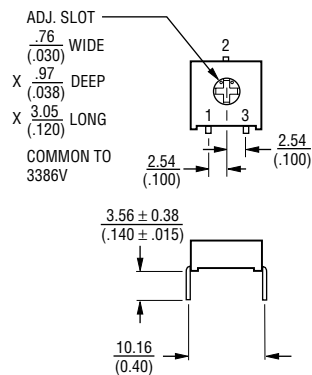


### 3386V

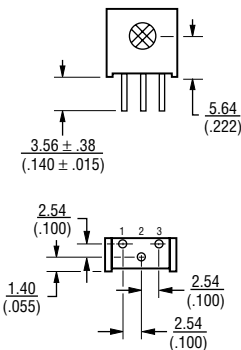


### 3386H-EY5 3386X-EY5 – SHOWN

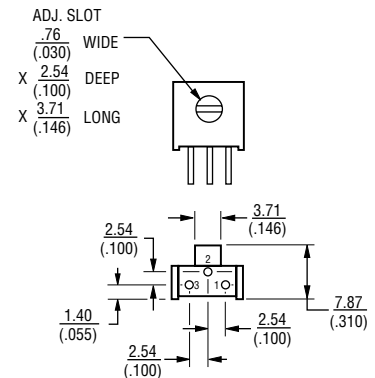

### 3386P-EY5



The Model 3386 is available with a knob for finger adjustment. Add suffix letter "T" to order code for F, P and X terminal styles.

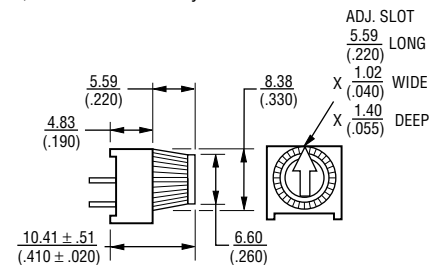

SHADED AREAS NOT RECOMMENDED FOR NEW DESIGNS.